

Spirally wound strip brush loose Specification Form

Brushworks®

Customer Details

Contact Person:..... Company Name:.....

Phone:..... Fax:.....

Email:.....

Strip width (F)	Min. pitch (D)	Min. shaft diameter (B)	
mm	TPI	mm	inch
5	5	19	$\frac{3}{4}$
8	2.5 - 3	36	$1\frac{1}{2}$
12	2	152	6

TPI = turns per inch

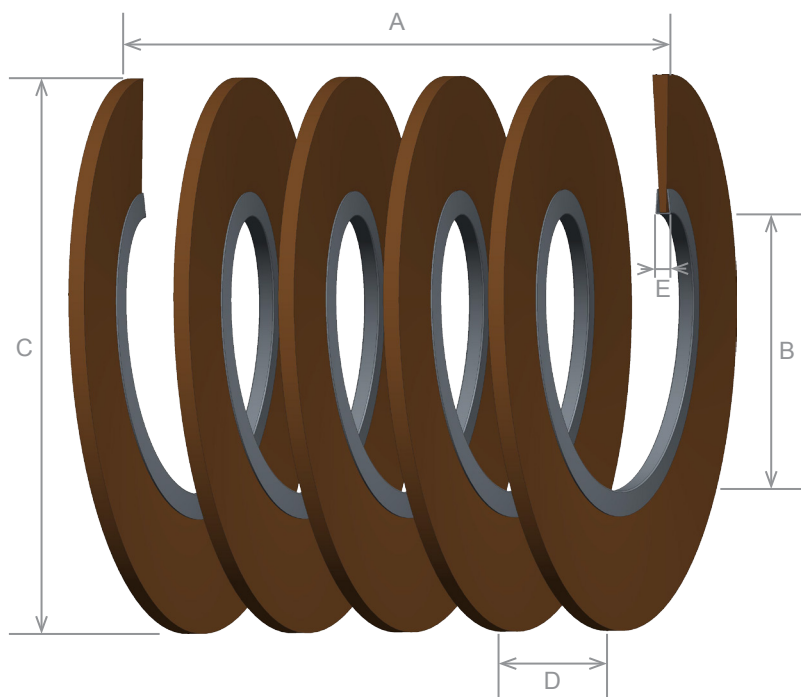
Dimensions

Overall length - in use (A):
(i.e. brush face required)

Shaft diameter (B):

Brush diameter (C):

Pitch (D):.....

Strip width (E): ☐ 5 ☐ 8 ☐ 12No. of turns: TPI
OR
Total

Fill material

Fibre Type:

Gauge (diameter):

Fill density:

☐ Light ☐ Medium ☐ HeavyStrip material ☐ Galvanised steel
☐ Stainless steel

Application

(please let us know any other important information on the intended application)

Quantity:

Preferred Delivery Date:

Please print, scan and email, or fax this form to:

Talus Industries NZ Ltd

Custom-made Products Department

Ph: +64 0800 100 345 | Fax: +64 0800 500 345 | Email: sales@talusindustries.co.nz